



ΕΦΗΜΕΡΙΔΑ ΤΗΣ ΚΥΒΕΡΝΗΣΕΩΣ ΤΗΣ ΕΛΛΗΝΙΚΗΣ ΔΗΜΟΚΡΑΤΙΑΣ

28 Ιουλίου 2021

ΤΕΥΧΟΣ ΔΕΥΤΕΡΟ

Αρ. Φύλλου 3406

ΑΠΟΦΑΣΕΙΣ

Αριθμ. 2222.1/52075/2021

Έγκριση και αποδοχή των προτύπων για την αξιολόγηση της διαστασιολόγησης του εγκάρσιου κάθετα αυλακωτού υδατοστεγούς διαφράγματος μεταξύ των δύο ακροπρωαίων κυτών φορτίου και για την αξιολόγηση της επιτρεπόμενης φόρτωσης του ακροπρωαίου κύτους φορτίου, τα οποία υιοθετήθηκαν με την υπ' αρ. 4 απόφαση της Διάσκεψης για την SOLAS του 1997 (1997 SOLAS Conference).

Ο ΥΠΟΥΡΓΟΣ ΝΑΥΤΙΛΙΑΣ ΚΑΙ ΝΗΣΙΩΤΙΚΗΣ ΠΟΛΙΤΙΚΗΣ

Έχοντας υπόψη:

1. Τις διατάξεις:

α) του άρθρου 13 του ν. 4770/2021 «Ολοκληρωμένη θαλάσσια πολιτική στον νησιωτικό χώρο, διατάξεις για συμμόρφωση με υποχρεώσεις διεθνούς ναυσιπλοΐας και την αναβάθμιση Λ.Σ. - ΕΛ.ΑΚΤ. και ειδικές ρυθμίσεις για την ψηφιοποίηση και εν γένει ενίσχυση της ανταγωνιστικότητας της ελληνικής ναυτιλίας στη μετά-COVID εποχή» (Α' 15),

β) της παρ. 2 του άρθρου 2 του ν. 2013/1992 «Αποδοχή Τροποποιήσεων του Κεφαλαίου Ι του Παραρτήματος της Διεθνούς Σύμβασης περί ασφαλείας της ανθρώπινης ζωής στη θάλασσα 1974 και άλλες σχετικές διατάξεις» (Α' 28),

γ) του π.δ. 83/2019 «Διορισμός Αντιπροέδρου της Κυβέρνησης, Υπουργών, Αναπληρωτών Υπουργών και Υφυπουργών» (Α' 121),

δ) του κανονισμού 6 του Κεφαλαίου XII (Πρόσθετα μέτρα ασφαλείας για τα πλοία χύδην φορτίου) του Παραρτήματος του π.δ. 28/2007 (Α' 23), σύμφωνα με το οποίο κατέστησαν υποχρεωτικά τα πρότυπα αντοχής διαφράγματος πλοίων μεταφοράς φορτίου χύδην μονού τοιχώματος,

ε) του άρθρου 90 του «Κώδικα νομοθεσίας για την Κυβέρνηση και τα κυβερνητικά όργανα» [άρθρο πρώτο του π.δ. 63/2005 (Α' 98)], όπως διατηρήθηκε σε ισχύ με την παρ. 22 του άρθρου 119 του ν. 4622/2019 (Α' 133).

2. Το γεγονός ότι από τις διατάξεις του παρόντος δεν προκαλείται δαπάνη σε βάρος του κρατικού προϋπολογισμού, σύμφωνα με το υπ' αρ. 2811.8/48443/2021/05-07-2021 έγγραφο Γ.Δ.Ο.Υ., αποφασίζουμε:

Άρθρο 1

1. Εγκρίνονται και γίνονται αποδεκτά τα πρότυπα για την αξιολόγηση της διαστασιολόγησης του εγκάρσιου κάθετα αυλακωτού υδατοστεγούς διαφράγματος μεταξύ των δύο ακροπρωαίων κυτών φορτίου και για την αξιολόγηση της επιτρεπόμενης φόρτωσης του ακροπρωαίου κύτους φορτίου, σύμφωνα με την Απόφαση 4 της Διάσκεψης για την SOLAS του 1997 του Διεθνούς Ναυτιλιακού Οργανισμού (IMO), όπως αυτά ισχύουν κάθε φορά.

2. Το κείμενο της απόφασης, παρατίθεται σε πρωτότυπο στην αγγλική γλώσσα.

RESOLUTION 4**STANDARDS FOR THE EVALUATION OF SCANTLINGS OF THE TRANSVERSE WATERTIGHT VERTICALLY CORRUGATED BULKHEAD BETWEEN THE TWO FOREMOST CARGO HOLDS AND FOR THE EVALUATION OF ALLOWABLE HOLD LOADING OF THE FOREMOST CARGO HOLD**

THE CONFERENCE,

HAVING ADOPTED amendments to the International Convention for the Safety of Life at Sea (SOLAS), 1974, as amended, concerning the safety of bulk carriers,

CONSIDERING that new SOLAS regulation XII/6 requires that the transverse watertight vertically corrugated bulkhead between the two foremost cargo holds and the double bottom structure in way of the foremost cargo hold of bulk carriers of 150 m in length and upwards of single side skin construction, carrying solid bulk cargoes having a density of 1780 kg/m³ and above, should have sufficient strength, in compliance with the Bulk carrier bulkhead and double bottom standards developed by the Organization, to withstand flooding of the foremost cargo hold, taking also into account dynamic effects,

BEING OF THE OPINION that the implementation by Governments of the said regulation in accordance with the implementation schedule prescribed in new SOLAS regulation XII/3 will greatly contribute to enhancing the safety of existing bulk carriers and safeguarding the lives of those on board,

HAVING CONSIDERED the recommendation made by the Maritime Safety Committee of the International Maritime Organization at its sixty eighth session,

ADOPTS:

- .1 the Standards for the evaluation of scantlings of the transverse watertight vertically corrugated bulkhead between the two foremost cargo holds, set out in Annex 1 to the present resolution; and
- .2 the Standards for the evaluation of allowable hold loading of the foremost cargo hold, set out in Annex 2 to the present resolution,

for the purpose of application of SOLAS regulation XII/6.

ANNEX 1**STANDARDS FOR THE EVALUATION OF SCANTLINGS OF THE TRANSVERSE WATERTIGHT VERTICALLY CORRUGATED BULKHEAD BETWEEN THE TWO FOREMOST CARGO HOLDS****1 INTRODUCTION**

The net scantlings of the transverse watertight vertically corrugated bulkhead between the two foremost cargo holds are to be calculated using the loads given in Section 2, the bending moment and shear force given in Section 3 and the strength criteria given in Section 4.

Where necessary, steel renewal and/or reinforcements are required as per Section 6.

In these standards, homogeneous loading condition means a loading condition in which the ratio between the highest and the lowest filling ratio, evaluated for the two foremost cargo holds, does not exceed 1.20, to be corrected for different cargo densities.

2 LOAD MODEL**2.1 General**

The loads to be considered as acting on the bulkhead are those given by the combination of the cargo loads with those induced by the flooding of the foremost cargo hold.

The most severe combinations of cargo induced loads and flooding loads are to be used for the check of the scantlings of the bulkhead, depending on the loading conditions included in the loading manual:

- homogeneous loading conditions;
- non-homogeneous loading conditions.

Non-homogeneous part loading conditions associated with multiport loading and unloading operations for homogeneous loading conditions need not to be considered according to these standards.

2.2 Bulkhead corrugation flooding head

The flooding head h_f (see figure 1) is the distance, in m, measured vertically with the ship in the upright position, from the calculation point to a level located at a distance d_f , in m, from the baseline equal to:

(a) in general:

D


(b) for ships less than 50,000 tonnes deadweight with Type B freeboard:

$0.95 \times D$

Where:

D = the distance, in m, from the baseline to the freeboard deck at side amidship (see figure 1).

Figure 1

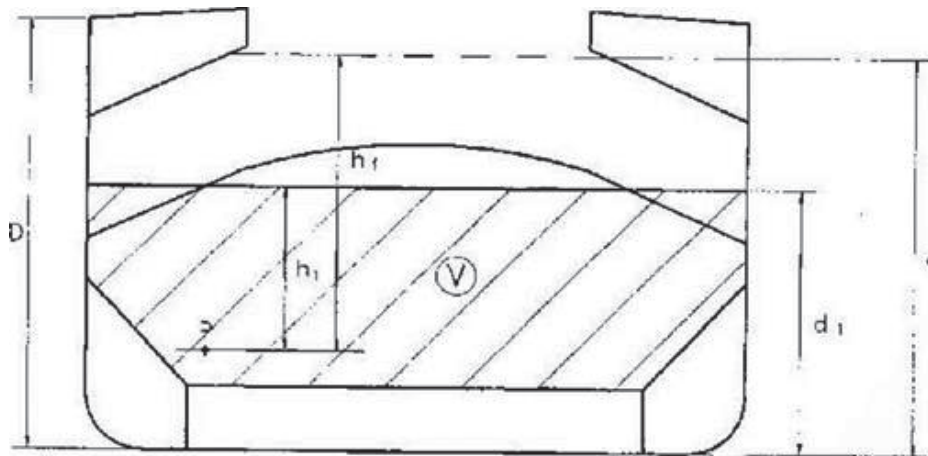

V = Volume of cargo

P = Calculation point

(c) for ships to be operated at an assigned load line draught T_r less than the permissible loadline draught T , the flooding head defined in (a) and (b) may be reduced by $T - T_r$.

2.3 Pressure in the flooded hold

2.3.1 Bulk cargo loaded hold

Two cases are to be considered, depending on the values of d_1 and d_f , d_1 (see figure 1) being a distance from the baseline given, in m, by:

$$d_1 = \frac{M_c}{(\rho \times l_c \times B)} + \frac{VLS}{(l_c \times B)} + (h_{HT} h_{DB}) \times \frac{b_{HT}}{B} + h_{DB}$$

where:

M_c = mass of cargo, in tonnes, in the foremost cargo hold

ρ_c = bulk cargo density, in t/m^3

l_c = length of the foremost cargo hold, in m

B = ship's breadth amidships, in m

VLS = volume, in m^3 , of the bottom stool above the inner bottom

h_{HT} = height of the hopper tanks amidship, in m, from the baseline

h_{DB} = height of the double bottom, in m

b_{HT} = breadth of the hopper tanks amidship, in m.

(a) $d_f \geq d_1$

At each point of the bulkhead located at a distance between d_1 and d_f from the baseline, the pressure $p_{c,f}$, in kN/m^2 , is given by:

$$p_{c,f} = p \times g \times h_f$$

where:

ρ = sea water density, in t/m^3

$g = 9.81 \text{ m/s}^2$, gravity acceleration

h_f = flooding head as defined in section 2.2.

At each point of the bulkhead located at a distance lower than d_1 from the baseline, the pressure $p_{c,f}$, in kN/m^2 is given by:

$$p_{c,f} = \rho \times g \times h_f + [p_c - \rho \times (1 - \text{perm})] \times g \times h_1 \times \tan^2(\gamma)$$

where:

ρ, g, h_f = as given above

p_c = bulk cargo density, in t/m^3

perm = permeability of cargo, to be taken as 0.3 for ore (the corresponding bulk cargo density for iron ore may generally be taken as 3.0 t/m^3).

h_1 = vertical distance, in m, from the calculation point to a level located at a distance d_1 , as defined above, from the base line (see figure 1)

$\gamma = 45 \text{ degrees } (\varphi/2)$

φ = angle of repose of the cargo, in degrees, which may generally be taken as 35 degrees for iron ore.

The force $F_{c,f}$, in kN, acting on a corrugation is given by:

$$F_{c,f} = s_1 \times [\rho \times g \times ((d_f - d_1)^2/2) + ((\rho \times g \times (d_f - d_1) + (p_{c,f})_{le})/2) \times (d_1 - h_{DB} - h_{LS})]$$

where:

s_1 = spacing of corrugations, in m (see figure 2a)


ρ, g, d_1, h_{DB} = as given above

d_f = as given in 2.2

$(p_{c,f})_{le}$ = pressure, in kN/m^2 , at the lower end of the corrugation

h_{LS} = height of the lower stool, in m, from the inner bottom.

Figure 2a

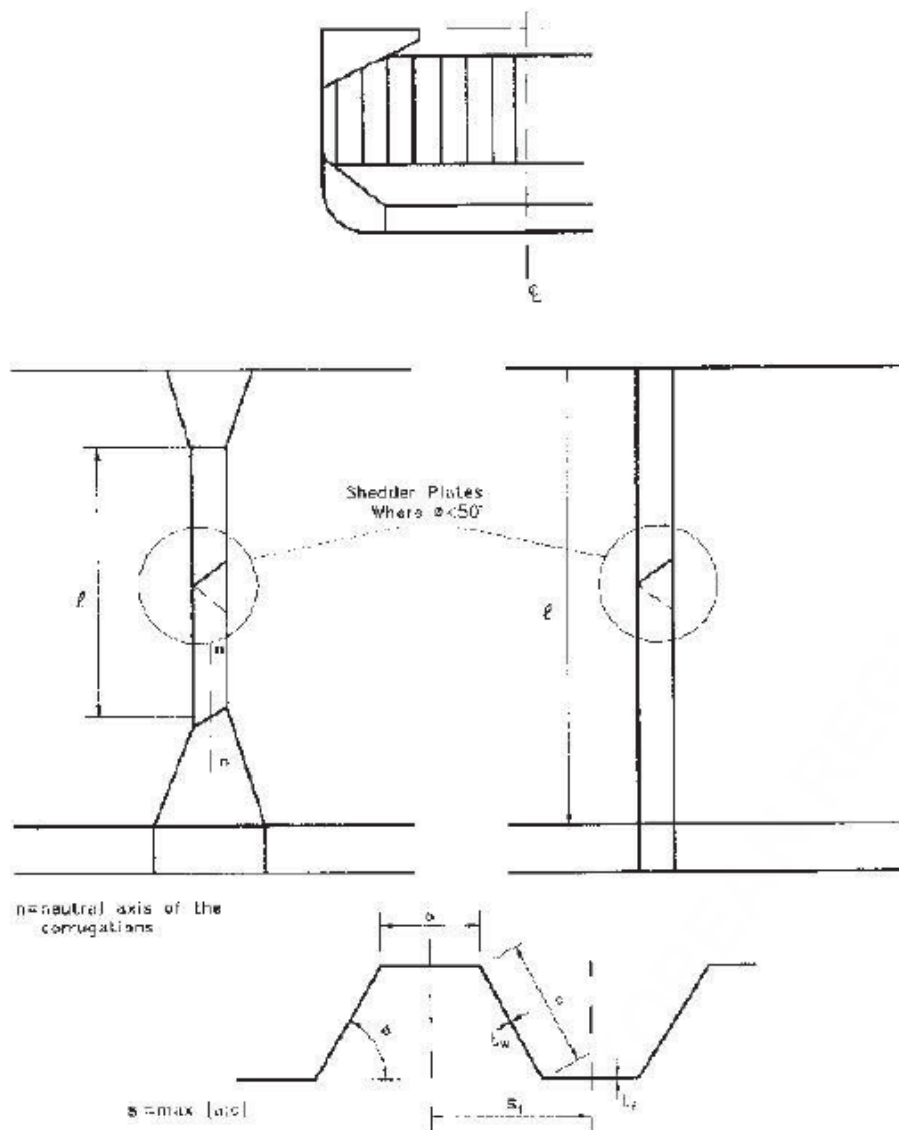

(b) $df < d_1$

At each point of the bulkhead located at a distance between df and d_1 from the baseline, the pressure $p_{c,f}$, in kN/m^2 , is given by:

$$p_{c,f} = \rho \times g \times h_1 \times \tan^2(\gamma)$$

where:

ρ , g , h_1 , γ = as given in (a)

At each point of the bulkhead located at a distance lower than df from the baseline, the pressure $p_{c,f}$, in kN/m^2 , is given by:

$$p_{c,f} = \rho \times g \times hf + [\rho \times h_1 - \rho \times (1 - \text{perm}) \times hf] \times \tan^2(\gamma)$$

where:

ρ , g , hf , p_c , h_1 , perm , γ = as given in (a)

The force $F_{c,f}$, in kN, acting on a corrugation is given by:

$$F_{c,f} = s_1 \times [\rho \times g \times ((d_1 - d_f)^2 / 2) \times \tan^2(\gamma) + ((\rho \times g \times (d_1 - d_f) \times \tan^2(\gamma) + (\rho \times f) \times l_e) / 2) \times (d_f - h_{DB} - h_{LS})]$$

where:

s_1 , ρ , g , γ , $(\rho \times f) \times l_e$, h_{LS} = as given in (a)

d_1 , h_{DB} = as given above

d_f = as given in 2.2.

2.3.2 Empty hold

At each point of the bulkhead, the hydrostatic pressure p_f induced by the flooding head h_f is to be considered.

The force F_f , in kN, acting on a corrugation is given by:

$$F_f = s_1 \times \rho \times g \times ((d_f - h_{DB} - h_{LS})^2) / 2$$

where:

s_1 , ρ , g , h_{LS} = as given in 2.3.1 (a)

h_{DB} = as given in 2.3.1

d_f = as given in 2.2

2.4 Pressure in the non-flooded bulk cargo loaded hold

At each point of the bulkhead, the pressure p_c , in kN/m², is given by:

$$p_c = \rho \times g \times h_1 \times \tan^2(\gamma)$$

where:

ρ , g , h_1 , γ = as given in 2.3.1 (a)

The force F_c , in kN, acting on a corrugation is given by:

$$F_c = \rho \times g \times s_1 \times (d_1 - h_{DB} - h_{LS})^2 / 2 \times \tan^2(\gamma)$$

where:

ρ , g , s_1 , h_{LS} , γ = as given in 2.3.1 (a)

d_1 , h_{DB} = as given in 2.3.1.

2.5 Resultant pressure

2.5.1 Homogeneous loading conditions

At each point in the bulkhead structure, the resultant pressure p , in kN/m², to be considered for the scantlings of the bulkhead, is given by:

$$p = p_{c,f} - 0.8 \times p_c$$

The resultant force F , in kN, acting on a corrugation is given by:

$$F = F_{c,f} - 0.8 \times F_c$$

2.5.2 Non-homogeneous loading conditions

At each point in the bulkhead structure, the resultant pressure p in kN/m^2 , to be considered for the scantlings of the bulkhead, is given by:

$$p = p_{c,f}$$

The resultant force F , in kN , acting on a corrugation is given by:

$$F = F_{c,f}$$

In case the foremost cargo hold, in non-homogenous loading conditions, is not allowed to be loaded, the resultant pressure p , in kN/m^2 , to be considered for the scantlings of the bulkhead is given by:

$$p = p_f$$

and the resultant force F , in kN , acting on a corrugation is given by:

$$F = F_f$$

3 BENDING MOMENT AND SHEAR FORCE IN THE BULKHEAD CORRUGATIONS

The bending moment M and the shear force Q in the bulkhead corrugations are obtained using the formulae given in 3.1 and 3.2. The M and Q values are to be used for the checks in Section 4.

3.1 Bending moment

The design bending moment M , in kN/m , for the bulkhead corrugations is given by:

$$M = F \times \ell / 8$$

where:

F = resultant force, in kN , as given in 2.5

ℓ = span of the corrugation, in m , to be taken according to figures 2a and 2b

3.2 Shear force

The shear force Q , in kN , at the lower end of the bulkhead corrugations is given by:

$$Q = 0.8 \times F$$

where:

F = as given in 2.5

4 STRENGTH CRITERIA

4.1 General

The following criteria are applicable to transverse bulkheads with vertical corrugations (see figure 2a).

Requirements for local net plate thickness are given in 4.7.

In addition, the criteria given in 4.2 and 4.5 are to be complied with.

Where the corrugation angle φ shown in figure 2a is less than 50 degrees, an horizontal row of staggered shedder plates is to be fitted at approximately mid depth of the corrugations (see figure 2a) to help preserve dimensional stability of the bulkhead under flooding loads. The shedder plates are to be welded to the corrugations by double continuous welding, but they are not to be welded to the side shell.

The thicknesses of the lower part of corrugations considered in the application of 4.2 and 4.3 are to be maintained for a distance from the inner bottom (if no lower stool is fitted) or the top of the lower stool not less than 0.15ℓ .

The thicknesses of the middle part of corrugations considered in the application of 4.2 and 4.4 are to be maintained to a distance from the deck (if no upper stool is fitted) or the bottom of the upper stool not greater than 0.3 ℓ .

4.2 Bending capacity and shear stress

The bending capacity is to comply with the following relationship:

$$10^3 \times (M / (0.5 \times Z_{le} \times \sigma_{a,le} + Z_m \times \sigma_{a,m})) \leq 1,0$$

where:

M = bending moment, in kN/m, as given in 3.1.

Z_{le} = section modulus of one half pitch corrugation, in cm^3 , at the lower end of corrugations, to be calculated according to 4.3.

Z_m = section modulus of one half pitch corrugation, in cm^3 , at the mid-span of corrugations, to be calculated according to 4.4.

$\sigma_{a,le}$ = allowable stress, in N/mm^2 , as given in 4.5, for the lower end of corrugations

$\sigma_{a,m}$ = allowable stress, in N/mm^2 as given in 4.5, for the mid-span of corrugations.

In no case is Z_m to be taken greater than the lesser of 1.15 Z_{le} and 1.15 Z'_{le} for calculation of the bending capacity, Z'_{le} being defined below.

In case effective shedder plates are fitted which:

- are not knuckled;
- are welded to the corrugations and the top of the lower stool by one side penetration welds or equivalent;
- are fitted with a minimum slope of 45 degrees and their lower edge is in line with the stool side plating;

or effective gusset plates are fitted which:

- are fitted in line with the stool side plating;
- have material properties at least equal to those provided for the flanges,

the section modulus Z_{le} , in cm^3 , is to be taken not larger than the value Z'_{le} , in cm^3 , given by:

$$Z'_{le} = Z_g + 10^3 \times (Q \times h_g - 0.5 \times h_g^2 \times s_1 \times p_g) / \sigma_a$$

where:

Z_g = section modulus of one half pitch corrugation, in cm^3 , according to 4.4, in way of the upper end of shedder or gusset plates, as applicable

Q = shear force, in kN, as given in 3.2

h_g = height, in m, of shedders or gusset plates, as applicable (see figures 3a, 3b, 4a and 4b)

s_1 = as given in 2.3.1 (a)

p_g = resultant pressure, in kN/m^2 , as defined in 2.5, calculated in way of the middle of the shedders or gusset plates, as applicable

σ_a = allowable stress, in N/mm^2 , as given in 4.5.

Figure 3


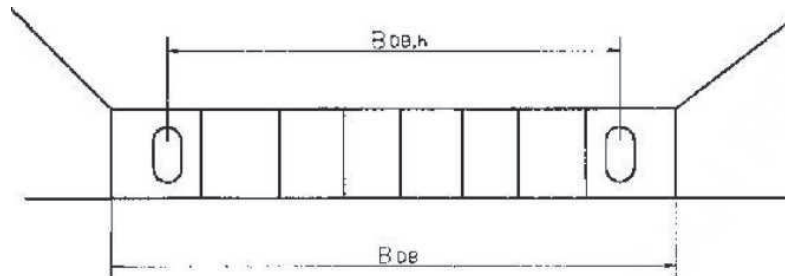


Figure 4a

Symmetric gusset / shedder plates

Figure 4b

Asymmetric gusset / shedder plates

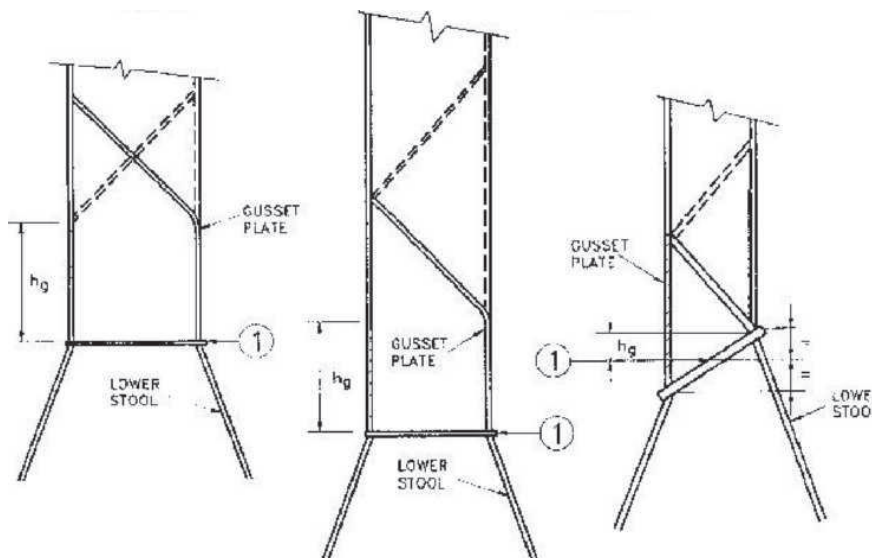

Shear stresses τ are obtained by dividing the shear force Q by the shear area. The shear area is to be reduced in order to account for possible non-perpendicularity between the corrugation webs and flanges. In general, the reduced shear area may be obtained by multiplying the web sectional area by $(\sin \varphi)$, φ being the angle between the web and the flange.

When calculating the section moduli and the shear area, the net plate thicknesses are to be used.

The section moduli of corrugations are to be calculated on the basis of the requirements standards given in 4.3 and 4.4.

4.3 Section modulus at the lower end of corrugations

The section modulus is to be calculated with the compression flange having an effective flange width, b_{ef} , not larger than as given in 4.6.1.

If the corrugation webs are not supported by local brackets below the stool top (or below the inner bottom) in the lower part, the section modulus of the corrugations is to be calculated considering the corrugation webs 30% effective.

(a) Provided that effective shedder plates, as defined in 4.2, are fitted (see figures 3a and 3b), when calculating the section modulus of corrugations at the lower end (cross-section (1) in figures 3a and 3b), the area of the flange plates, in cm^2 , may be increased by

$$[2.5 \times a \times \sqrt{(t_f \times t_{sh}) \times \sqrt{(\sigma_{Fsh}/\sigma_{Ffl})}}] \text{ (not to be taken greater than } 2.5 \cdot a \cdot t_f)$$

where:

a = width, in m, of the corrugation flange (see figure 2a)

t_{sh} = net shedder plate thickness, in mm

t_f = net flange thickness, in mm

σ_{Fsh} = minimum upper yield stress, in N/mm^2 , of the material used for the shedder plates

σ_{Ffl} = minimum upper yield stress, in N/mm^2 , of the material used for the corrugation flanges.

(b) Provided that effective gusset plates, as defined in 4.2, are fitted (see figures 4a and 4b), when calculating the section modulus of corrugations at the lower end (cross-section (1) in figures 4a and 4b), the area of flange plates, in cm^2 , may be increased by $(7 \times h_g \times t_{gu})$

where:

h_g = height of gusset plate in m, see figures 4a and 4b, not to be taken greater than $[(10/7) \times s_{gu}]$

s_{gu} = width of the gusset plates, in m

t_{gu} = net gusset plate thickness, in mm, not to be taken greater than t_f

t_f = net flange thickness, in mm, based on the as built condition.

(c) If the corrugation webs are welded to a sloping stool top plate which is at an angle not less than 45 degrees with the horizontal plane, the section modulus of the corrugations may be calculated considering the corrugation webs fully effective. In case effective gusset plates are fitted, when calculating the section modulus of corrugations the area of flange plates may be increased as specified in (b) above. No credit can be given to shedder plates only.

For angles less than 45 degrees, the effectiveness of the web may be obtained by linear interpolation between 30% for 0 degrees and 100% for 45 degrees.

4.4 Section modulus of corrugations at cross-sections other than the lower end

The section modulus is to be calculated with the corrugation webs considered effective and the compression flange having an effective flange width, b_{ef} , not larger than as given in 4.6.1.

4.5 Allowable stress check

The normal and shear stresses σ and τ are not to exceed the allowable values σ_a and τ_a , in N/mm^2 , given by:

$$\sigma_a = \sigma_F$$

$$\tau_a = 0.5 \times \sigma_F$$

where:

σ_F = the minimum upper yield stress, in N/mm^2 , of the material.

4.6 Effective compression flange width and shear buckling check

4.6.1 Effective width of the compression flange of corrugations

The effective width b_{ef} , in m, of the corrugation flange is given by:

$$b_{ef} = C_e \times a$$

where:

$$C_e = 2.25/\beta - 1.25/(\beta^2) \quad \text{for } \beta > 1.25$$

$$C_e = 1.0 \quad \text{for } \beta \leq 1.25$$

$$\beta = 10^3 \times a/t_f \times \sqrt{(\sigma_F / E)}$$

t_f = net flange thickness, in mm

a = width, in m, of the corrugation flange (see figure 2a)

σ_F = minimum upper yield stress, in N/mm², of the material

E = modulus of elasticity, in N/mm², to be assumed equal to 2.06×10^5 N/mm² for steel.

4.6.2 Shear

The buckling check is to be performed for the web plates at the corrugation ends.

The shear stress τ is not to exceed the critical value τ_c , in N/mm², as obtained from the following:

$$\tau_c = \tau_E \quad \text{when } \tau \leq (\tau_F)/2$$

$$= \tau [1 - (\tau_F)/(4 \tau_E)] \quad \text{when } \tau > (\tau_F)/2$$

where:

$$\tau_F = \sigma_F / \sqrt{3}$$

σ_F = minimum upper yield stress, in N/mm², of the material as given in 4.6.1

$$\tau_E = 0.9 \times k_t \times E (t/1000c)^2$$

k_t , E , t , and c are given by:

$$k_t = 6.34$$

E = modulus of elasticity of material as given in 4.6.1

t = net thickness, in mm, of corrugation web

c = width, in m, of corrugation web (see figure 2a)

4.7 Local net plate thickness

The bulkhead local net plate thickness t , in mm, is given by:

$$t = 14.9 \times s_w \times \sqrt{(p/\sigma_F)}$$

where:

s_w = plate width, in m, to be taken equal to the width of the corrugation flange or web, whichever is the greater (see figure 2a)

p = resultant pressure, in kN/m², as defined in 2.5, at the bottom of each strake of plating; in all cases, the net thickness of the lowest strake is to be determined using the resultant pressure at the top of the lower stool, or at the inner bottom, if no lower stool is fitted or at the top of the shedders, if shedder or gusset/shedder plates are fitted.

σ_F = minimum upper yield stress, in N/mm², of the material.

For built-up corrugated bulkheads, when the thicknesses of the flange and web are different, the net thickness of the narrower plating is to be not less than t_n , in mm, given by:

$$t_n = 14.9 \times s_n \times \sqrt{(p/\sigma F)}$$

s_n = the width, in m, of the narrower plating.

The net thickness of the wider plating, in mm, is not to be taken less than the maximum of the following values:

$$t_w = 14.9 \times s_w \times \sqrt{(p/\sigma F)}$$

and

$$t_w = \sqrt{[(440 \times s_w^2 \times p)/\sigma F - t_n^2]}$$

where $t_n \leq$ actual net thickness of the narrower plating and not to be greater than

$$14.9 \times s_w \times \sqrt{(p/\sigma F)}$$

5 LOCAL DETAILS

As applicable, the design of local details is to comply with the requirements of the Administration or of an organization recognized by the Administration in accordance with the provisions of SOLAS regulation XI/1 (hereinafter referred to as "the Administration") for the purpose of transferring the corrugated bulkhead forces and moments to the boundary structures, in particular to the double bottom and cross-deck structures.

In particular, the thickness and stiffening of gusset and shedder plates, installed for strengthening purposes, is to comply with the requirements of the Administration on the basis of the load model in Section 2.

Unless otherwise stated, weld connections and materials are to be dimensioned and selected in accordance with the requirements of the Administration.

6 CORROSION ADDITION AND STEEL RENEWAL

(a) Steel renewal is required where the gauged thickness is less than $t_{net} + 0.5$ mm, t_{net} being the thickness used for the calculation of bending capacity and shear stresses as given in 4.2 or the local net plate thickness as given in 4.7. Alternatively, reinforcing doubling strips may be used providing the net thickness is not dictated by shear strength requirements for web plates (see 4.5 and 4.6.2) or by local pressure requirements for web and flange plates (see 4.7).

Where the gauged thickness is within the range $t_{net} + 0.5$ mm and $t_{net} + 1.0$ mm, coating (applied in accordance with the coating manufacturer's requirements) or annual gauging may be adopted as an alternative to steel renewal.

(b) Where steel renewal or reinforcement is required, a minimum thickness of $t_{net} + 2.5$ mm is to be replenished for the renewed or reinforced parts.

(c) Gussets with shedder plates, extending from the lower end of corrugations up to 0.1ℓ , or reinforcing doubling strips (on bulkhead corrugations and stool side plating) are to be fitted, when:

$$0.8 \times (\sigma F_{fl} \times t_{fl}) \geq \sigma F_s \times t_s$$

where:

σF_{fl} = minimum upper yield stress, in N/mm², of the material used for the corrugation flanges


σF_s = minimum upper yield stress, in N/mm², of the material used for the lower stool side plating or floors (if no stool is fitted)

tfl= flange thickness, in mm, which is found to be acceptable on the basis of the criteria specified in (a) above or, when steel renewal is required, the replenished thickness according to the criteria specified in (b) above. The above flange thickness dictated by local pressure requirements (see 4.7) need not be considered for this purpose

tst= as built thickness, in mm, of the lower stool side plating or floors (if no stool is fitted)

If gusset plates are fitted, the material of such gusset plates is to be the same as that of the corrugation flanges. The gusset plates are to be connected to the lower stool shelf plate or inner bottom (if no lower stool is fitted) by deep penetration welds (see figure 5).

Figure 5

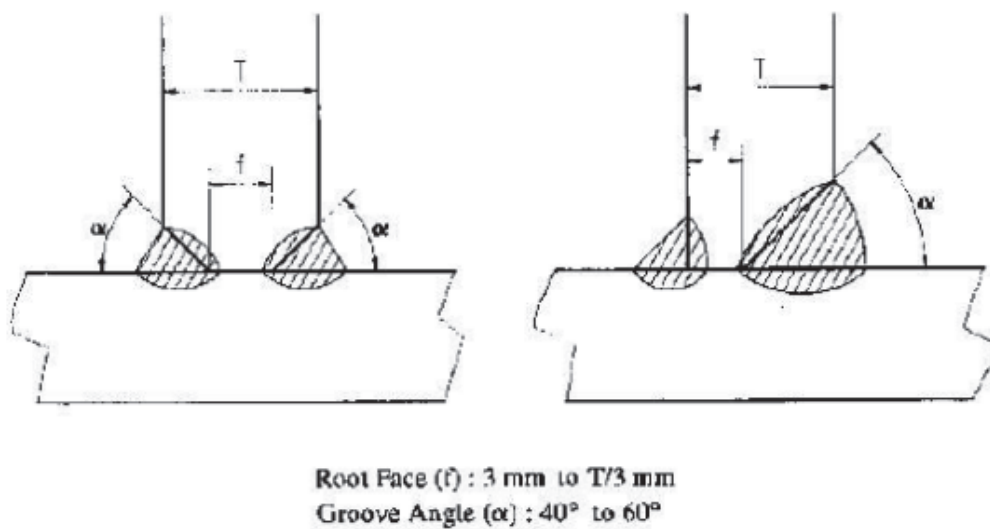

(d) Where steel renewal is required, the bulkhead connections to the lower stool shelf plate or inner bottom (if no stool is fitted) are to be at least made by deep penetration welds (see figure 5).

(e) Where gusset plates are to be fitted or renewed, their connections with the corrugations and the lower stool shelf plate or inner bottom (if no stool is fitted) are to be at least made by deep penetration welds (see figure 5).

ANNEX 2**STANDARDS FOR THE EVALUATION OF ALLOWABLE HOLD LOADING OF THE FOREMOST CARGO HOLD****1 INTRODUCTION**

The loading in the foremost cargo hold is not to exceed the allowable hold loading in the flooded condition, calculated as per Section 4, using the loads given in Section 2 and the shear capacity of the double bottom given in Section 3.

In no case is the allowable hold loading in the flooding condition to be taken greater than the design hold loading in the intact condition.

2 LOAD MODEL**2.1 General**

The loads to be considered as acting on the double bottom of the foremost cargo hold are those given by the external sea pressures and the combination of the cargo loads with those induced by the flooding of the foremost cargo hold.

The most severe combinations of cargo induced loads and flooding loads are to be used, depending on the loading conditions included in the loading manual:

- homogeneous loading conditions;
- non-homogeneous loading conditions;
- packed cargo conditions (such as steel mill products).

For each loading condition, the maximum bulk cargo density to be carried is to be considered in calculating the allowable hold limit.

2.2 Inner bottom flooding head

The flooding head h_f (see figure 1) is the distance, in m, measured vertically with the ship in the upright position, from the inner bottom to a level located at a distance d_f , in m, from the baseline equal to:

D , in general; or

$0.95 D$ for ships of less than 50,000 tonnes deadweight with Type B freeboard.

D being the distance, in m, from the baseline to the freeboard deck at side amidship (see figure 1).

3 SHEAR CAPACITY OF THE DOUBLE BOTTOM STRUCTURE IN WAY OF THE FOREMOST CARGO HOLD

The shear capacity C of the double bottom structure in way of the foremost cargo hold is defined as the sum of the shear strength at each end of:

- all floors adjacent to both hoppers, less one half of the strength of the two floors adjacent to each stool, or transverse bulkhead if no stool is fitted (see figure 2); and
- all double bottom girders adjacent to both stools, or transverse bulkheads if no stool is fitted.

The strength of girders or floors which run out and are not directly attached to the boundary stool or hopper girder is to be evaluated for the one end only.

Note that the floors and girders to be considered are those inside the hold boundaries formed by the hoppers and stools (or transverse bulkheads if no stool is fitted). The hopper side girders and the floors

directly below the connection of the bulkhead stools (or transverse bulkheads if no stool is fitted) to the inner bottom are not to be included.

When the geometry and/or the structural arrangement of the double bottom are such as to make the above assumptions inadequate, to the discretion of the Administration or of an organization recognized by the Administration in accordance with the provisions of SOLAS regulation XI/1 (hereinafter referred to as "the Administration"), the shear capacity C of the double bottom is to be calculated according to the criteria laid down by the Administration.

In calculating the shear strength, the net thickness of floors and girders are to be used. The net thickness t_{net} , in mm, is given by:

$$t_{net} = t - t_c$$

where:

t = as built thickness, in mm, of floors and girders

t_c = corrosion diminution, equal to 2 mm, in general; a lower value of t_c may be adopted, provided that measures are taken, to the satisfaction of the Administration to justify the assumption made.

3.1 Floor shear strength

The floor shear strength in way of the floor panel adjacent to hoppers S_{f1} , in kN, and the floor shear strength in way of the openings in the "outermost" bay (i.e. that bay which is closest to the hopper) S_{f2} , in kN, are given by the following expressions:

$$S_{f1} = 10^{-3} \times A_f \times \tau \times a / \eta_1$$

$$S_{f2} = 10^{-3} \times A_{f,h} \times \tau \times a / \eta_2$$

where:

A_f = sectional area, in mm², of the floor panel adjacent to the hoppers

$A_{f,h}$ = net sectional area, in mm², of the floor panels in way of the openings in the "outermost" bay (i.e. that bay which is closest to the hopper)

$\tau \times a$ = allowable shear stress, in N/mm², to be taken equal to $\sigma F / \sqrt{3}$

σF = minimum upper yield stress, in N/mm², of the material

$$\eta_1 = 1.10$$

$$\eta_2 = 1.20$$

η_2 may be reduced, at the discretion of the Administration, down to 1.10 where appropriate reinforcements are fitted to the satisfaction of the Administration.

3.2 Girder shear strength

The girder shear strength in way of the girder panel adjacent to stools (or transverse bulkheads, if no stool is fitted) S_{g1} , in kN, and the girder shear strength in way of the largest opening in the "outermost" bay (i.e. that bay which is closest to stool, or transverse bulkhead, if no stool is fitted) S_{g2} , in kN, are given by the following expressions:

$$S_{g1} = 10^{-3} \times A_g \times \tau \times a / \eta_1$$

$$S_{g2} = 10^{-3} \times A_{g,h} \times \tau \times a / \eta_2$$

where:

A_g = minimum sectional area, in mm², of the girder panel adjacent to the stools (or transverse bulkheads, if no stool is fitted)

$A_{g,h}$ = net sectional area, in mm^2 , of the girder panel in way of the largest opening in the "outermost" bay (i.e. that bay which is closest to the stool, or transverse bulkhead, if no stool is fitted)

τ_a = allowable shear stress, in N/mm^2 , as given in 3.1

$\eta_1 = 1.10$

$\eta_2 = 1.15$

η_2 may be reduced, at the discretion of the Administration, down to 1.10 where appropriate reinforcements are fitted to the satisfaction of the Administration.

4 ALLOWABLE HOLD LOADING

The allowable hold loading W , in tonnes, is given by:

$$W = \rho_c \times V \times l/F$$

where:

$F = 1.05$ in general 1.00 for steel mill products

ρ_c = cargo density, in t/m^3 ; for bulk cargoes, see 2.1; for steel products, ρ_c is to be taken as the density of steel

V = volume, in m^3 , occupied by cargo at a level h_1

$h_1 = X/(\rho_c \times g)$

X = for bulk cargoes, the lesser of X_1 and X_2 given by

$$X_1 = (Z + \rho \times g (E - hf))/(1 + (\rho/\rho_c) \times (\text{perm} - 1))$$

$$X_2 = Z + \rho \times g \times (E - hf \times \text{perm})$$

X = for steel products, X may be taken as X_1 , using $\text{perm} = 0$

ρ = sea water density, in t/m^3

$g = 9.81 \text{ m/s}^2$, gravity acceleration

$E = df - 0.1 \times D$

df, D = as given in 2.2

hf = flooding head, in m , as defined in 2.2

perm = permeability of cargo, to be taken as 0.3 for ore (corresponding bulk cargo density for iron ore may generally be taken as 3.0 t/m^3)

Z = the lesser of Z_1 and Z_2 given by:

$$Z_1 = Ch/ADB_h, Z_2 = Ce/ADB_{V,e}$$

Ch = shear capacity of the double bottom, in kN , as defined in Section 3, considering, for each floor, the lesser of the shear strengths Sf_1 and Sf_2 (see 3.1) and, for each girder, the lesser of the shear strengths Sg_1 and Sg_2 (see 3.2)

Ce = shear capacity of the double bottom, in kN , as defined in Section 3, considering, for each floor, the shear strength Sf_1 (see 3.1) and, for each girder, the lesser of the shear strengths Sg_1 and Sg_2 (see 3.2)

ADB_h = sum from $i=1$ to $i=n$ of $(Si \times BDB_i)$

$ADB_{V,e}$ = sum from $i=1$ to $i=n$ of $(Si \times BDB_i - s)$

n = number of floors between stools (or transverse bulkheads, if no stool is fitted)

Si = space of i th-floor, in m

$BDB_i = BDB - s$ for floors whose shear strength is given by $Sf1$ (see 3.1)


$BDB_i = BDB_h$ for floors whose shear strength is given by $Sf2$ (see 3.1)

BDB = breadth of double bottom, in m, between hoppers (see figure 3)

BDB_h = distance, in m, between the two considered opening (see figure 3)

s = spacing, in m, of double bottom longitudinals adjacent to hoppers.

Figure 1

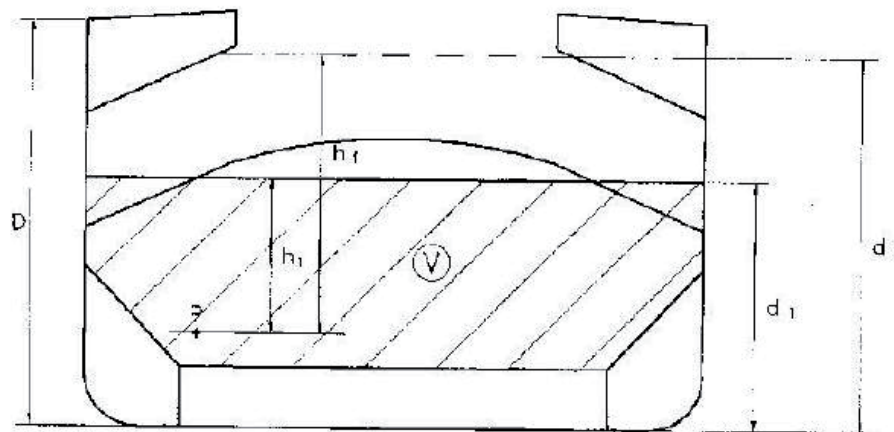

V = Volume of cargo

P = Calculation point

Figure 2a


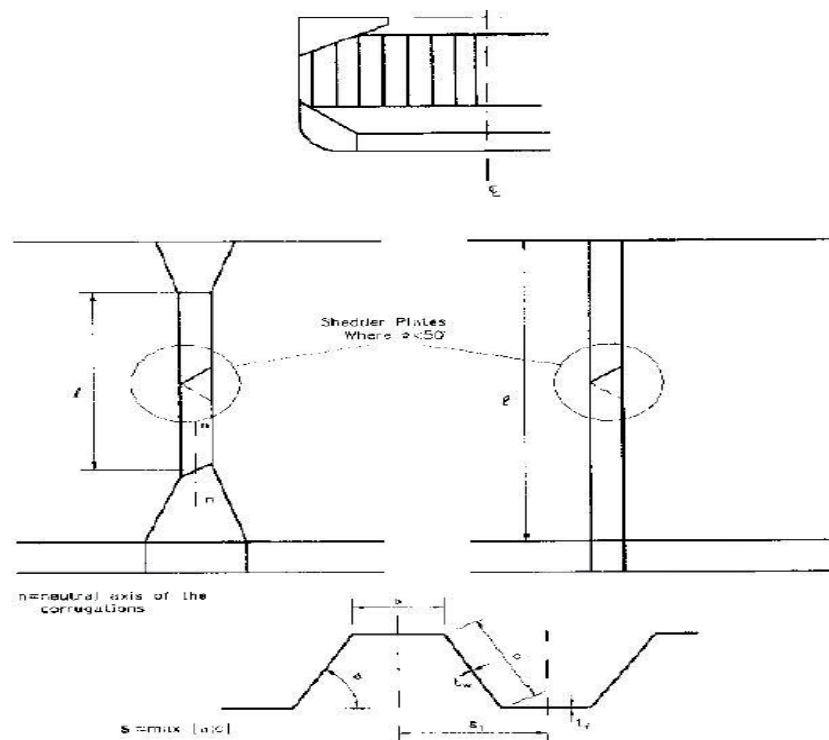


Figure 3

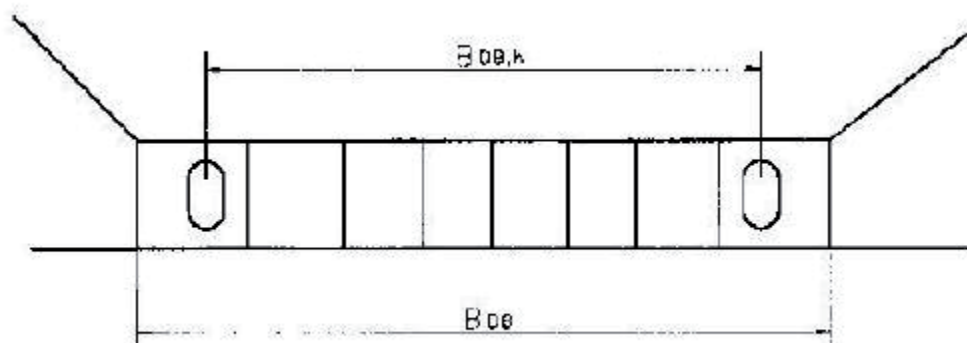

Άρθρο 2

Έναρξη ισχύος

Η ισχύς της απόφασης αυτής αρχίζει από τη δημοσίευσή της στην Εφημερίδα της Κυβερνήσεως.

Η απόφαση αυτή να δημοσιευθεί στην Εφημερίδα της Κυβερνήσεως.

Πειραιάς, 16 Ιουλίου 2021

Ο Υπουργός

ΙΩΑΝΝΗΣ ΠΛΑΚΙΩΤΑΚΗΣ



ΕΘΝΙΚΟ ΤΥΠΟΓΡΑΦΕΙΟ

Το Εθνικό Τυπογραφείο αποτελεί δημόσια υπηρεσία υπαγόμενη στην Προεδρία της Κυβέρνησης και έχει την ευθύνη τόσο για τη σύνταξη, διαχείριση, εκτύπωση και κυκλοφορία των Φύλλων της Εφημερίδας της Κυβερνήσεως (ΦΕΚ), όσο και για την κάλυψη των εκτυπωτικών - εκδοτικών αναγκών του δημοσίου και του ευρύτερου δημόσιου τομέα (ν. 3469/2006/Α' 131 και π.δ. 29/2018/Α' 58).

1. ΦΥΛΛΟ ΤΗΣ ΕΦΗΜΕΡΙΔΑΣ ΤΗΣ ΚΥΒΕΡΝΗΣΕΩΣ (ΦΕΚ)

- Τα **ΦΕΚ σε ηλεκτρονική μορφή** διατίθενται δωρεάν στο **www.et.gr**, την επίσημη ιστοσελίδα του Εθνικού Τυπογραφείου. Όσα ΦΕΚ δεν έχουν ψηφιοποιηθεί και καταχωριστεί στην ανωτέρω ιστοσελίδα, ψηφιοποιούνται και αποστέλλονται επίσης δωρεάν με την υποβολή αίτησης, για την οποία αρκεί η συμπλήρωση των αναγκαίων στοιχείων σε ειδική φόρμα στον ιστότοπο **www.et.gr**.
- Τα **ΦΕΚ σε έντυπη μορφή** διατίθενται σε μεμονωμένα φύλλα είτε απευθείας από το Τμήμα Πωλήσεων και Συνδρομητών, είτε ταχυδρομικά με την αποστολή αιτήματος παραγγελίας μέσω των ΚΕΠ, είτε με ετήσια συνδρομή μέσω του Τμήματος Πωλήσεων και Συνδρομητών. Το κόστος ενός ασπρόμαυρου ΦΕΚ από 1 έως 16 σελίδες είναι 1,00 €, αλλά για κάθε επιπλέον οκτασέλιδο (ή μέρος αυτού) προσαυξάνεται κατά 0,20 €. Το κόστος ενός έγχρωμου ΦΕΚ από 1 έως 16 σελίδες είναι 1,50 €, αλλά για κάθε επιπλέον οκτασέλιδο (ή μέρος αυτού) προσαυξάνεται κατά 0,30 €. Το τεύχος Α.Σ.Ε.Π. διατίθεται δωρεάν.

• Τρόποι αποστολής κειμένων προς δημοσίευση:

- Α. Τα κείμενα προς δημοσίευση στο ΦΕΚ, από τις υπηρεσίες και τους φορείς του δημοσίου, αποστέλλονται ηλεκτρονικά στη διεύθυνση **webmaster.et@et.gr** με χρήση προηγμένης ψηφιακής υπογραφής και χρονοσήμανσης.
- Β. Κατ' εξαίρεση, όσοι πολίτες δεν διαθέτουν προηγμένη ψηφιακή υπογραφή μπορούν είτε να αποστέλλουν ταχυδρομικά, είτε να καταθέτουν με εκπρόσωπό τους κείμενα προς δημοσίευση εκτυπωμένα σε χαρτί στο Τμήμα Παραλαβής και Καταχώρισης Δημοσιευμάτων.

- Πληροφορίες, σχετικά με την αποστολή/κατάθεση εγγράφων προς δημοσίευση, την ημερήσια κυκλοφορία των Φ.Ε.Κ., με την πώληση των τευχών και με τους ισχύοντες τιμοκαταλόγους για όλες τις υπηρεσίες μας, περιλαμβάνονται στον ιστότοπο (**www.et.gr**). Επίσης μέσω του ιστότοπου δίδονται πληροφορίες σχετικά με την πορεία δημοσίευσης των εγγράφων, με βάση τον Κωδικό Αριθμό Δημοσιεύματος (ΚΑΔ). Πρόκειται για τον αριθμό που εκδίδει το Εθνικό Τυπογραφείο για όλα τα κείμενα που πληρούν τις προϋποθέσεις δημοσίευσης.

2. ΕΚΤΥΠΩΤΙΚΕΣ - ΕΚΔΟΤΙΚΕΣ ΑΝΑΓΚΕΣ ΤΟΥ ΔΗΜΟΣΙΟΥ

Το Εθνικό Τυπογραφείο ανταποκρινόμενο σε αιτήματα υπηρεσιών και φορέων του δημοσίου αναλαμβάνει να σχεδιάσει και να εκτυπώσει έντυπα, φυλλάδια, βιβλία, αφίσες, μπλοκ, μηχανογραφικά έντυπα, φακέλους για κάθε χρήση, κ.ά.

Επίσης σχεδιάζει ψηφιακές εκδόσεις, λογότυπα και παράγει οπτικοακουστικό υλικό.

Ταχυδρομική Διεύθυνση: Καποδιστρίου 34, τ.κ. 10432, Αθήνα

ΤΗΛΕΦΩΝΙΚΟ ΚΕΝΤΡΟ: 210 5279000 - fax: 210 5279054

ΕΞΥΠΗΡΕΤΗΣΗ ΚΟΙΝΟΥ

Πωλήσεις - Συνδρομές: (Ισόγειο, τηλ. 210 5279178 - 180)

Πληροφορίες: (Ισόγειο, Γρ. 3 και τηλεφ. κέντρο 210 5279000)

Παραλαβή Δημ. Ύλης: (Ισόγειο, τηλ. 210 5279167, 210 5279139)

Ωράριο για το κοινό: Δευτέρα ως Παρασκευή: 8:00 - 13:30

Ιστότοπος: **www.et.gr**

Πληροφορίες σχετικά με την λειτουργία του ιστότοπου: **helpdesk.et@et.gr**

Αποστολή ψηφιακά υπογεγραμμένων εγγράφων προς δημοσίευση στο ΦΕΚ: **webmaster.et@et.gr**

Πληροφορίες για γενικό πρωτόκολλο και αλληλογραφία: **grammateia@et.gr**

Πείτε μας τη γνώμη σας,

για να βελτιώσουμε τις υπηρεσίες μας, συμπληρώνοντας την ειδική φόρμα στον ιστότοπό μας.

